

Flooring series for your next order.

Compare six distinct series, then request the sample and quotation for the construction you want to buy. This catalogue describes series options and ordering scope. Your agreed product sheet, physical sample and purchase terms identify the actual order.

Series	Starting choice	Product family
Wood-look SPC	4 / 5 / 6 mm SPC	SPC Flooring
Herringbone SPC	120 x 600 / 150 x 750 mm	SPC Flooring
8mm SPC	8 mm	SPC Flooring
Wood-look LVT	Oak / walnut / hickory / ash	LVT Flooring
Tile-effect LVT	305 x 305 to 457 x 914 mm	LVT Flooring
WSPC sliced-veneer series	0.3-0.5 mm sliced hardwood veneer	Wood Veneer SPC

Your next step

A current specification, reference sample or target price is enough to begin. Your quotation can identify the construction, quantity per decor, packing scope, proposed origin and production timing.

sales@eleflooring.com / www.eleflooring.com

For eligible U.S. imports, Thailand-origin SPC can offer a tariff advantage over comparable China-origin goods. Classification, qualifying origin and import-date rules determine actual treatment. No fixed saving is stated in this catalogue.

Wood-Look SPC Flooring

Your wood-look range can combine 4, 5 or 6 mm SPC cores with the tone, grain and finish your customers choose. We manufacture the printed-decor flooring, including EIR surfaces that follow the wood pattern. Your quote identifies the complete construction and packing scope.



Core options: 4 / 5 / 6 mm SPC
Wear layer: 0.3 / 0.5 / 0.7 mm
Standard MOQ: 1,000 m² per SKU
Standard samples: Within 7 days after design confirmation

Specification and configuration

Configuration	Available options	Your quotation records
SPC core	4 / 5 / 6 mm	The selected core thickness, separate from backing.
Wear layer	0.3 / 0.5 / 0.7 mm	Approximately 12 / 20 / 28 mil; the selected construction and relevant evidence.
Plank format	1,220 x 183 mm; 1,524 x 228 mm	Standard and wide-plank options, confirmed with the joint arrangement.
Surface	EIR, deep emboss or hand-scraped	Texture, gloss and the physical approval reference.
Backing	Factory-attached IXPE or EVA options	The proposed material, pad thickness and complete plank build-up.
Branding	Private-label cartons and labels	Artwork, quantity per decor and agreed packing scope.

Wood-look SPC / Ordering and approval

Exact combinations, total thickness and product documents are confirmed with your quotation. Reference images show appearance or construction direction; they are not dimensioned SKU drawings.

Order item	Starting point	Commercial scope
Standard collection MOQ	1,000 m ² per SKU	Quantity per decor; mixed-order terms confirmed with your quotation.
Standard samples	Within 7 days after design confirmation	Dispatch timing; shipping charges and transit agreed separately.
Existing-film production	Typically 15-20 days from order confirmation	Container-ready target subject to film availability, quantity and the confirmed production schedule.
New EIR tooling	Typically 2-3 weeks for plate development	After design confirmation; new decor film development and the complete custom timeline are quoted separately.

Oak as a core collection

Light, natural and white oak references let you compare warmth and grain contrast within a familiar wood direction. Your showroom shortlist can cover different interiors without relying on a screen image to settle the color.

Walnut for a different position

Dark walnut gives your range a stronger contrast to pale oak. We review the approved color reference during production; a shift in a dark tone is especially noticeable when your customers lay boards side by side.

The approval record for your order

Keep the agreed construction, decor or species, finish and backing with the approved physical sample. Your quotation identifies quantity, branding and delivery scope. Request the product-specific installation, care and relevant market documents for technical review.

Source and enquiry


Series reference: <https://www.eleflooring.com/spc-flooring/wood-spc-flooring/>

Source: <https://www.eleflooring.com/spc-flooring/wood-spc-flooring/>

Contact: sales@eleflooring.com / <https://www.eleflooring.com/contact/>

Herringbone SPC Flooring

Your herringbone range can use 120 x 600 or 150 x 750 mm SPC planks. We machine your directional click profiles in-house and check assembled panels. Your samples and quotation cover the decor, construction and packing you want to offer.

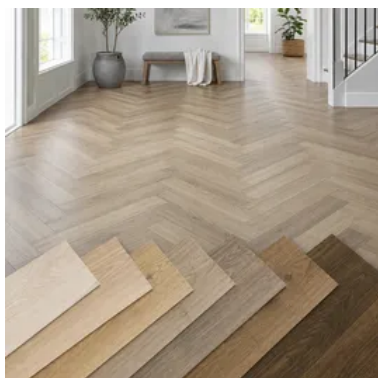

Plank formats: 120 x 600 / 150 x 750 mm

Core options: 4 / 5 / 6 mm SPC

Standard MOQ: 1,000 m² per SKU

Sample dispatch: Within 7 days after design confirmation

Specification and configuration

Selection	Available options	Order detail
Plank format	120 x 600 mm or 150 x 750 mm	Your chosen repeat scale and matching joint arrangement.
Rigid core	4 / 5 / 6 mm SPC	Core thickness listed separately from attached backing.
Wear layer	0.3 / 0.5 / 0.7 mm	Approximately 12 / 20 / 28 mil; intended use reviewed with the product evidence.
Surface	EIR, crystal or hand-scraped options	The proposed decor, texture and gloss confirmed by sample.
Backing	Factory-attached IXPE or EVA options	The selected pad and full plank build-up stated in the quotation.
Pattern	Classic herringbone; chevron by separate request	A chevron configuration has different end geometry and needs its own confirmation.

Herringbone SPC / Ordering and approval

Exact combinations, total thickness and product documents are confirmed with your quotation. Reference images show appearance or construction direction; they are not dimensioned SKU drawings.

Order item	Starting point	Scope to confirm
Standard MOQ	1,000 m ² per SKU	Your decor, construction and order mix.
Standard samples	Within 7 days after design confirmation	Dispatch timing; sample charges and transit agreed separately.
Existing-decors production	Typically 15-25 days ex-factory	After order confirmation, subject to film availability and the agreed schedule.
New decor or dimensions	Development quotation	Tooling, film availability, sample approval and the complete production timeline.
Shipping plan	By selected product and destination	Carton coverage, weight and freight scope; no universal container loading count.

120 x 600 mm

This shorter format creates more repeats over a given floor area. Your designer can compare the rhythm at room scale, including the cuts where the pattern meets walls and doorways.

150 x 750 mm

Your larger format changes the visual scale and number of joints. We use the exact format for the quantity and packing review.

The approval record for your order

Keep the agreed construction, decor or species, finish and backing with the approved physical sample. Your quotation identifies quantity, branding and delivery scope. Request the product-specific installation, care and relevant market documents for technical review.

Source and enquiry

Series reference: <https://www.elefflooring.com/spc-flooring/herringbone-spc-flooring/>

Source: <https://www.elefflooring.com/spc-flooring/herringbone-spc-flooring/>

Contact: sales@elefflooring.com / <https://www.elefflooring.com/contact/>

8mm SPC Flooring

Give your customers a thicker rigid-core option with a clear construction behind the price. Elefloor's 8 mm SPC series lets you choose the wear layer, decor, finish and attached backing while keeping the core thickness fixed. Your quotation identifies the full assembly and production origin.



SPC core: 8 mm

Wear layers: 0.3 / 0.5 / 0.7 mm

Standard plank: 1,220 x 183 mm

Standard MOQ: 1,000 m² per SKU

Specification and configuration

Specification	Series starting point	Your order decision
Core	8 mm rigid SPC	The quote identifies core thickness separately from the full plank.
Wear layer	0.3 / 0.5 / 0.7 mm	Approximately 12 / 20 / 28 mil; a wear layer is not a stand-alone use-class rating.
Standard plank	1,220 x 183 mm	Your layout, price position and carton plan determine the useful format.
Dimensional options	150-230 mm wide; 600-1,800 mm long	Available pairings and any tooling requirement are confirmed before ordering.
Backing	Factory-attached IXPE or EVA, as quoted	The pad and surface layers affect total thickness; request the complete build-up.
Surface	EIR, deep emboss, hand-scraped or crystal	Your finish is approved on a physical sample.
Layout	Straight plank	Our 8 mm series is not offered as herringbone or chevron.
Standard collection MOQ	1,000 m ² per SKU	Quantity per decor and packaging are confirmed in the quotation.

8mm SPC / Ordering and approval

Exact combinations, total thickness and product documents are confirmed with your quotation. Reference images show appearance or construction direction; they are not dimensioned SKU drawings.

Stage	Standard series basis	When the scope changes
Opening order	1,000 m ² per SKU for standard decors	Confirm each decor quantity and any mixed-product request.
Samples	Within 7 days after design confirmation	New film or texture development follows a separate schedule; transit is additional.
Production	Quoted against volume and current scheduling	We confirm a production window for your quantity and the current line schedule.
Branding	Your agreed carton, label and care-instruction scope	Artwork and language approval are part of the order reference.
Shipment	Order-specific carton and pallet plan	Actual weights and payload limits determine loading; no universal container quantity applies.

Comparing unlike specifications

Your lower unit price can reflect a different wear layer, backing or finish even when both products are called 8mm SPC.

A floor-height conflict

A thick plank can create a transition or clearance problem if the project only allowed for the core figure.

The approval record for your order

Keep the agreed construction, decor or species, finish and backing with the approved physical sample. Your quotation identifies quantity, branding and delivery scope. Request the product-specific installation, care and relevant market documents for technical review.

Source and enquiry

Series reference: <https://www.eleflooring.com/spc-flooring/8mm-spc-flooring/>

Source: <https://www.eleflooring.com/spc-flooring/8mm-spc-flooring/>

Contact: sales@eleflooring.com / <https://www.eleflooring.com/contact/>

Wood-Look LVT Flooring

Your customer sees the color first and feels the finish next. Our oak, walnut, hickory and ash looks offer distinct grain and tonal directions. Your sample and quotation identify the appearance, wear layer, format and packaging together.



Wood-look families: Oak / walnut / hickory / ash

Plank width options: 152 / 178 / 228 mm

Wear layers: 0.2 / 0.3 / 0.5 / 0.7 mm

Standard collection MOQ: From 1,000 m² per SKU

Specification and configuration

Specification	Published options	Your order reference
Plank widths	152 / 178 / 228 mm	Approximately 6 / 7 / 9 in nominal widths.
Plank lengths	914 / 1,219 / 1,524 mm	Approximately 36 / 48 / 60 in nominal lengths.
Dry-back thickness	2-3 mm	Flexible glue-down construction and specified installation method.
Click thickness	4-5 mm including pad	Actual core, joint and backing identified in the quotation.
Wear layer options	0.2 / 0.3 / 0.5 / 0.7 mm	A separate value from total thickness or attached backing.
Surface treatments	EIR, hand-scraped, satin or matte	Texture availability checked against the selected decor film.
Click backing	IXPE or EVA, 1-1.5 mm options	Included backing and permitted installation assembly.

Wood-look LVT / Ordering and approval

Exact combinations, total thickness and product documents are confirmed with your quotation. Reference images show appearance or construction direction; they are not dimensioned SKU drawings.

Compare production samples

Existing-decor samples dispatch within 7 days after design confirmation. You can review grain, finish and joined boards. We confirm sample selection and shipping terms; transit is additional.

Agree the first-order scope

Standard collections start at 1,000 m² per SKU. New print, texture-plate or dimension development needs its own minimum and schedule. Your quotation identifies the scope before artwork and sample approval.

Prepare the branded pack

We can include your carton design, barcodes and care instructions. Coverage, labels and pallet configuration are reviewed with your receiving requirements, with the packing plan included in the supply discussion.

Oak

Light, mid-tone and darker oak give your collection a broad palette. Your shortlist can compare cleaner grain with stronger variation.

Walnut

Warm brown tones and pronounced grain contrast with pale oak. Your sample can test the color against cabinetry and finishes your customers already choose.

The approval record for your order

Keep the agreed construction, decor or species, finish and backing with the approved physical sample. Your quotation identifies quantity, branding and delivery scope. Request the product-specific installation, care and relevant market documents for technical review.

Source and enquiry


Series reference: <https://www.eleflooring.com/lvt-flooring/lvt-wood/>

Source: <https://www.eleflooring.com/lvt-flooring/lvt-wood/>

Contact: sales@eleflooring.com / <https://www.eleflooring.com/contact/>

Tile-Effect LVT Flooring

Our tile-effect LVT adds square and rectangular formats in marble, travertine, slate and concrete looks. You can compare dry-back and click configurations, then quote the finish, construction and packaging your customers will actually buy.

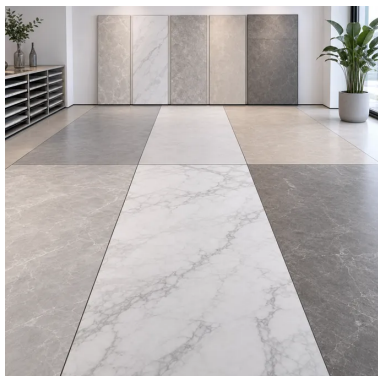

Standard tile sizes: 305 x 305 to 457 x 914 mm

Dry-back thickness: 2.5-3 mm

Wear layers: 0.3 / 0.5 / 0.7 mm

Standard collection MOQ: From 1,000 m² per SKU

Specification and configuration

Buying detail	Standard options	Your quotation confirms
Square formats	305 x 305 mm; 457 x 457 mm	Approximately 12 x 12 and 18 x 18 in; nominal dimensions.
Rectangular formats	305 x 610 mm; 457 x 914 mm	Approximately 12 x 24 and 18 x 36 in; available decor combinations.
Dry-back construction	2.5-3 mm	Flexible glue-down product and specified installation documents.
Click construction	4-5 mm including attached pad	Core identity, click profile and complete thickness breakdown.
Wear layer	0.3 / 0.5 / 0.7 mm	Exact surface specification and reports relevant to your use.
Surface options	Polished, matte, semi-matte, lightly textured	Finish matched to the selected stone visual.
Click backing	IXPE, 1-1.5 mm options	Included backing and permitted installation assembly.

Tile-effect LVT / Ordering and approval

Exact combinations, total thickness and product documents are confirmed with your quotation. Reference images show appearance or construction direction; they are not dimensioned SKU drawings.

Shortlist the appearance

Existing-decor samples dispatch within 7 days after design confirmation. We confirm the selection, sample cost and shipping terms; transit is additional. A new custom print follows its own schedule.

Fix the order reference

Your approved sample, tile size, construction, wear layer and artwork form the order record. We confirm MOQ, development scope and production timing for that configuration.

Review the shipment

Visual and pre-shipment checks cover the product and packing. Your receiving team can compare labels, quantities and batch references with the agreed order and packing list.

Square versus rectangular

A square format creates a different joint grid from a long rectangle. Your drawing can establish the starting line, offset and edge cuts before the material quantity is finalized.

Pattern across the floor

A marble image that looks convincing on one tile can feel repetitive across a room. Your review can use several pieces to compare vein direction, repeat appearance and the intended laying sequence.

The approval record for your order

Keep the agreed construction, decor or species, finish and backing with the approved physical sample. Your quotation identifies quantity, branding and delivery scope. Request the product-specific installation, care and relevant market documents for technical review.

Source and enquiry

Series reference: <https://www.eleflooring.com/lvt-flooring/lvt-tile-effect/>

Source: <https://www.eleflooring.com/lvt-flooring/lvt-tile-effect/>

Contact: sales@eleflooring.com / <https://www.eleflooring.com/contact/>

WSPC Flooring with a Sliced Hardwood Face

WSPC gives your collection a genuine hardwood face on a rigid SPC core. Your customer sees natural grain; your purchasing team gets a specification covering the veneer, bond, finish and backing. Elefloor quotes the complete construction, with physical samples to approve before production.



Surface: 0.3-0.5 mm sliced hardwood veneer

Core: 4-6 mm SPC; exact assembly quoted

Bond: PUR hot-melt lamination

Standard format: 1,220 x 183 mm reference

Optional pad: 1-1.5 mm IXPE

Specification and configuration

Component	WSPC starting point	Your order reference
Surface	0.3-0.5 mm sliced hardwood veneer	Species, grade, face thickness and selected finish.
Veneer bond	PUR hot-melt adhesive	The agreed lamination construction and relevant bond-check records.
Rigid core	4-6 mm SPC family range	The exact core and complete plank thickness, confirmed for your configuration.
Standard format	1,220 x 183 mm	Available format, joint arrangement and packing; custom sizes separately reviewed.
Attached backing	Optional IXPE, 1-1.5 mm	Whether the quoted thickness includes the pad; tested acoustic assembly if required.
Finish	UV lacquer, natural oil or brushed options	The physical surface reference and corresponding care instructions.

WSPC sliced-veneer series / Ordering and approval

Exact combinations, total thickness and product documents are confirmed with your quotation. Reference images show appearance or construction direction; they are not dimensioned SKU drawings.

Your requirement	Starting route	What we confirm
Standard species and finish	Existing wood veneer program	Available WSPC assembly, sample selection and quotation.
A different species	ODM sourcing and qualification	Veneer availability, appearance sample, bonding review and development schedule.
Non-standard dimensions	Format and production review	Feasibility, joint configuration, quantity and any setup requirements.
Your private label	Approved packaging artwork	Carton print, labels, care information and packing scope.

Oak

A starting direction for a coordinated real-wood range. Your approved sample defines the color treatment and visible character.

Walnut

A separate wood identity for your collection. Your sample comparison covers grain variation alongside the proposed surface treatment.

The approval record for your order

Keep the agreed construction, decor or species, finish and backing with the approved physical sample. Your quotation identifies quantity, branding and delivery scope. Request the product-specific installation, care and relevant market documents for technical review.

Source and enquiry

Series reference: <https://www.eleflooring.com/wood-veneer-spc-flooring/wspc-flooring/>

Source: <https://www.eleflooring.com/wood-veneer-spc-flooring/wspc-flooring/>

Contact: sales@eleflooring.com / <https://www.eleflooring.com/contact/>